

## GS™ -3384 RT

### Specifications

MODEL	GS™ -3384 RT	
MEASUREMENTS	Metric	US
Working height maximum*	12.06 m	39 ft
<b>A</b> Platform height maximum	10.06 m	33 ft
<b>B</b> Platform height - stowed**	1.55 m	5 ft 1 in
<b>C</b> Platform length:	3.98 m	13 ft 0.5 in
outside, extended - single deck	5.34 m	17 ft 6.25 in
outside, extended - dual deck	6.57 m	21 ft 6.5 in
<b>D</b> Slide-out platform extension deck - front	1.52 m	5 ft
<b>E</b> Slide-out platform extension deck - rear	1.22 m	4 ft
<b>F</b> Platform width - outside	1.83 m	6 ft
<b>G</b> Height - stowed: - folding guardrails	2.68 m	8 ft 9.5 in
- rails lowered	2.00 m	6 ft 6.75 in
<b>H</b> Length - stowed with outriggers	4.88 m	16 ft
<b>I</b> Width: - standard tyres	2.13 m	7 ft
- high flotation tyres	2.41 m	7 ft 11 in
<b>J</b> Wheelbase	2.84 m	9 ft 4 in
<b>K</b> Ground clearance - centre	0.33 m	13 in


PRODUCTIVITY		
Maximum platform occupancy	7	7
Lift capacity	1,134 kg	2,500 lbs
Lift capacity - extension deck	227 kg	500 lbs
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph
Gradeability - stowed***	50%	50%
Maximum outrigger leveling: - front to back	7°	7°
- side to side	12°	12°
Turning radius - inside	3.09 m	10 ft 1.5 in
Turning radius - outside	5.94 m	19 ft 6 in
Raise/lower speed	45 / 29 sec	45 / 29 sec
Controls	proportional	
Drive	four wheel	
Tyres - foam-filled rough terrain	25 x 79 cm	10 x 31 in

POWER		
Power source	Deutz D2011L03i 3 cylinder diesel 36 kW (49 hp) air cooled	
Auxiliary Power unit	12V DC	
Fuel tank capacity	113.6 L	30 gal
Hydraulic system capacity	113.6 L	30 gal

WEIGHT****		
with outriggers	6,743 kg	14,866 lbs

**STANDARDS COMPLIANCE**      ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2m to platform height. U.S. adds 6ft to platform height.  
 \*\* Based on RT tyres. Deduct 2 in (5.8 cm) for turf and non-marking.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards.

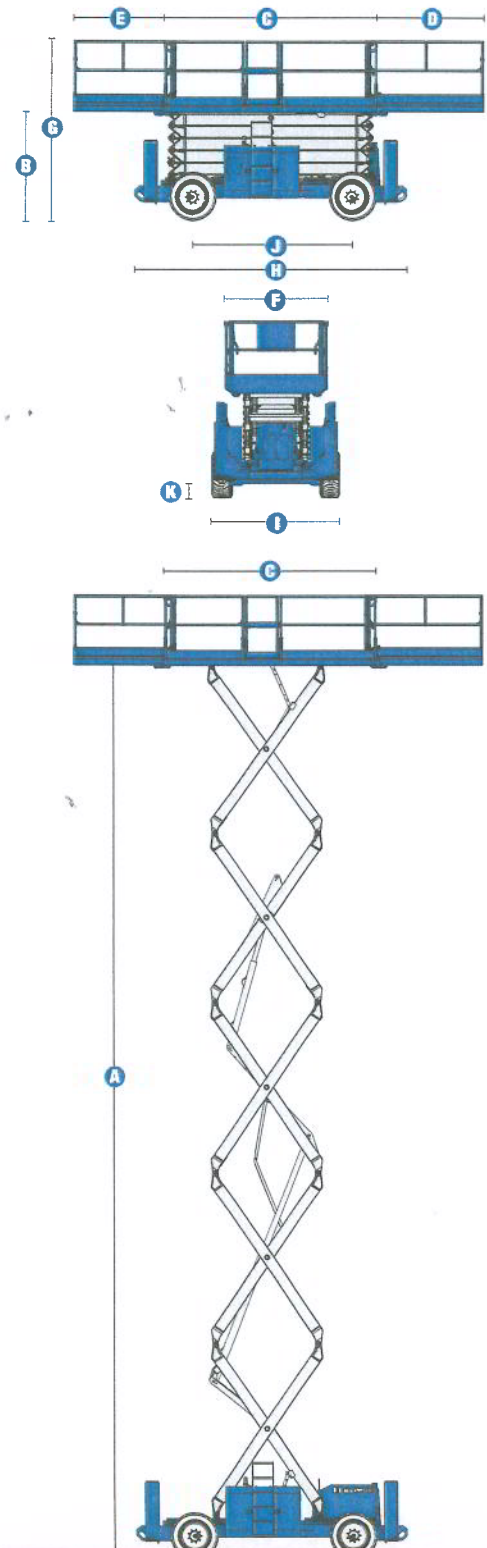

De Hoogwerkerstunter  
 Industrieweg 20, 5571 LJ Bergeijk  
 T +31 (0)85 400 00 15  
 info@hoogwerkerstunter.com  
 hoogwerkerstunter.com

IBANnr: NL65ABNA0534047440  
 BIC: ABNANL2A

Kamer van Koophandel: 17240941  
 BTW nummer: NL820357819801

## SELF-PROPELLED SCISSOR LIFTS

### GS™ -3384 RT



## Features

### STANDARD FEATURES

#### MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lbs) lift capacity

#### PRODUCTIVITY

- 3.98 m x 1.83 m (13 ft 0.5 in x 6 ft) steel frame platform with replaceable diamond plate deck
- Dual slide-out platform extension decks 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- Automatic leveling hydraulic outriggers
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- Two self-closing full height swing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Hydraulic oil cooler
- Foam-filled rough terrain tyres
- Tilt alarm
- Descent alarm
- Horn
- Hour meter
- Dual flashing beacons
- Motion alarm

#### POWER

- Deutz diesel 36 kW (49 hp)

### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Air line to platform
- Non-marking rough terrain tyres 25 x 79 cm (10 x 31 in)
- High flotation foam-filled tyres 41 x 84 cm (16 x 33 in)
- Platform work lights

#### POWER OPTIONS

- 7 kVA Hydraulic generator (240 V/50 Hz)
- Cold weather package
- Arctic package
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- 240 V power to platform



De Hoogwerkerstunter  
Industrieweg 20, 5571 LJ Bergeijk  
T +31 (0)85 400 00 15  
info@hoogwerkerstunter.com  
hoogwerkerstunter.com

IBANnr: NL65ABNA0534047440  
BIC: ABNANL2A

Kamer van Koophandel: 17240941  
BTW nummer: NL820357819B01