


## JLG MODEL 330CRT & 400CRT

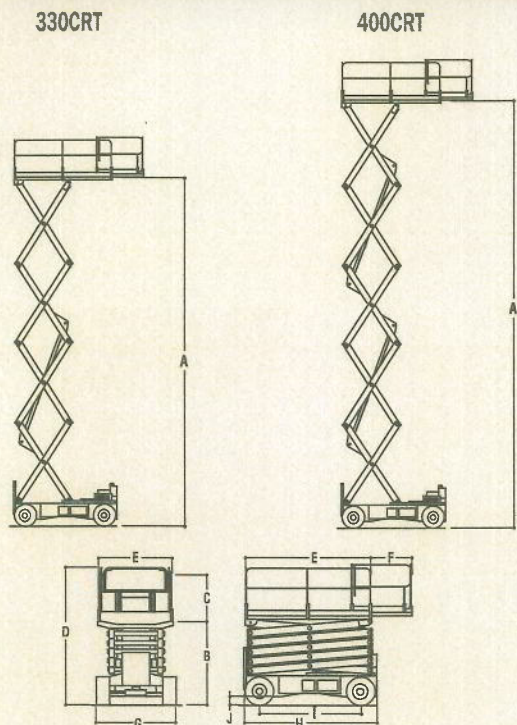

### DIMENSIONAL DATA

A. Platform Height - Elevated (330CRT)	33 ft. (10.06 m)
(400CRT)	40 ft. (12.19 m)
B. Platform Height - Stowed (330CRT)	5 ft. 6.5 in. (1.69 m)
(400CRT)	6 ft. 8.5 in. (2.04 m)
C. Platform Railing Height	3 ft. 7.5 in. (1.1 m)
D. Overall Height (Rails Up) (330CRT)	9 ft. (2.74 m)
(400CRT)	9 ft. 2.5 in. (2.81 m)
Overall Height (Rails Down)	6 ft. 5.5 in. (1.97 m)
E. Platform Size	65 x 115 in. (1.65 x 2.92 m)
F. Platform Extension	3 ft. (91 cm)
G. Overall Width	5 ft. 9 in. (1.75 m)
H. Overall Length	10 ft. 2 in. (3.1 m)
I. Wheelbase	90.5 in. (2.3 m)
J. Break-over Ground Clearance	10 in. (25 cm)
Platform Capacity (330CRT)	1,000 lbs. (450 kg)
(400CRT)	800 lbs. (360 kg)
Platform Extension Capacity	250 lbs. (113 kg)
Lift/Lower Time (330CRT)	38/42 seconds
(400CRT)	54/50 seconds
Maximum Drive Height (330CRT)	Full Elevation
(400CRT)	30 ft. (9.1m)
Gross Vehicle Weight (330CRT)	9,100 lbs. (4,128 kg)
(400CRT)	10,020 lbs. (4,545 kg)

### CHASSIS

Maximum Travel Speed	3.5 mph (5.6 kph)
Maximum Gradeability	35%
Turning Radius (Inside)	7 ft. (2.13 m)
Tire Size/Type	30.4 x 10 Foam Filled Lug
Oscillating Axle	Optional
Brakes	Spring Applied Hydraulic Released

### POWER SOURCE

Dual Fuel Engine	Kubota 750 24.5 hp (18.3 kW)
Diesel Engine	Kubota 1105 28 hp (21.7 kW)
Fuel Tank Capacity	13 gal. (49 L)
Hydraulic Reservoir	18 gal. (68 L)

## PERFORMANCE FEATURES

### Standard Features

Four-Wheel Drive  
Oscillating Axle  
3 ft. (91 cm) Deck Extension  
65 x 115 in. (1.65 x 2.92 m) Steel Platform  
Moveable, Removable Platform Control Box  
Fold-Down Handrails  
Access Gate with Chain  
Proportional Hydrostatic Drive Control with Thumb Steer  
Proportional Lift Up  
3 Degree Slope Alarm and Light  
110V-AC Receptacle in Platform  
Horn  
Hourmeter  
Lubrication-Free Scissor Arm Bushings  
Scissor Maintenance Prop  
Manual Descent Pull Cable  
Descent Alarm  
Heavy Gauge Steel Chassis Compartment Hoods  
30.4 x 10 in. Foam Filled Lug Tires

### Available Options

Hydraulic Leveling Jacks  
Platform Work Lights  
Full Swing Gate  
Tow Package  
Head and Tail Lights  
110V AC Power Pack (Generator)  
All Motion Alarm  
Flashing Beacon  
43.5 lb. (19.73 Kg) Propane Tank  
Spark Arrestor Muffler

## A New Level In Scissor Lift Design and Performance

JLG has created a new, high performance compact rough terrain (CRT) scissor lift series. Combining the improved terrainability of a larger rough terrain scissor lift with the compactness and maneuverability of a smaller scissor lift, the CRT Series is equally at home on or off slab.

- 35% gradeability boosts job site productivity
- 7 ft. (2.13 m) turning radius makes it easier to maneuver in tight spaces
- Compact design provides access through standard double doors
- Access gate slides up for drywall loading
- Deck length accommodates oversized drywall sheets
- Roll-out engine tray simplifies servicing

## Wide-Arm Stack

Scissor arm stance provides outstanding strength, durability and reduced arm deflection and sway.

## The JLG 1 & 5 Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. These machines meet or exceed applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453 and ANSI A92.6-1999 as originally manufactured for intended applications.

### JLG Industries, Inc.

1 JLG Drive  
McConnellsburg, PA 17233-9553  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
www.jlg.com



Printed in USA  
FORM NO.: SS-CRT-100-50M  
PART NO.: 3131403  
R08001



De Hoogwerkerstunter  
Industrieweg 20, 5571 LJ Bergeijk  
T +31 (0)85 400 00 15  
info@hoogwerkerstunter.com  
hoogwerkerstunter.com

IBANnr: NL65ABNA0534047440  
BIC: ABNANL2A

Kamer van Koophandel: 17240941  
BTW nummer: NL820357819B01