
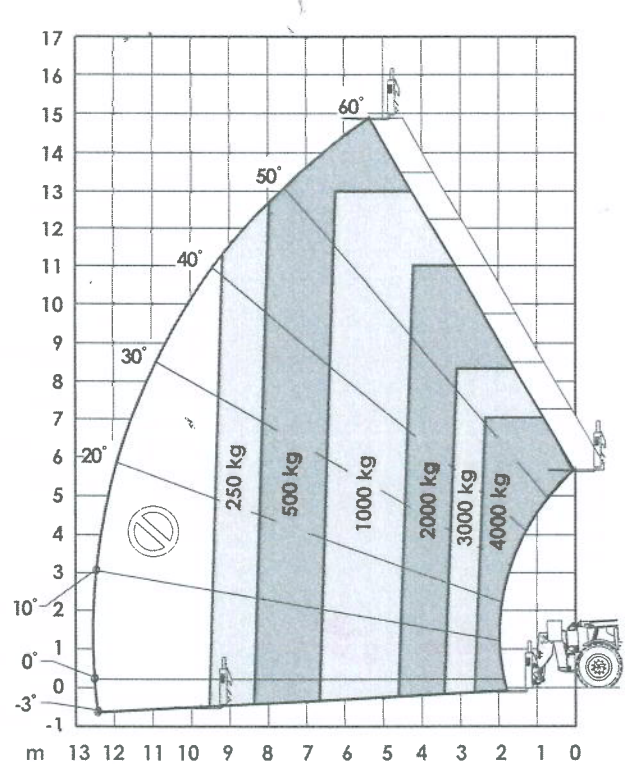


TELESCOPIC MATERIAL HANDLERS




JLG MODEL 4017PS

Dimensions

A. Overall Height	2.52 m
B. Overall Width	2.40 m
C. Width of Cab	0.89 m
D. Track width	1.92 m
E. Wheelbase	2.85 m
F. Length at front wheels	4.76 m
G. Length at fork-holder plate	6.09 m
H. Ground Clearance	0.42 m
I. Turning radius over tyres	3.80 m
J. Turning radius at fork	5.40 m
Gross Vehicle Weight (with forks).....	12,098 kg

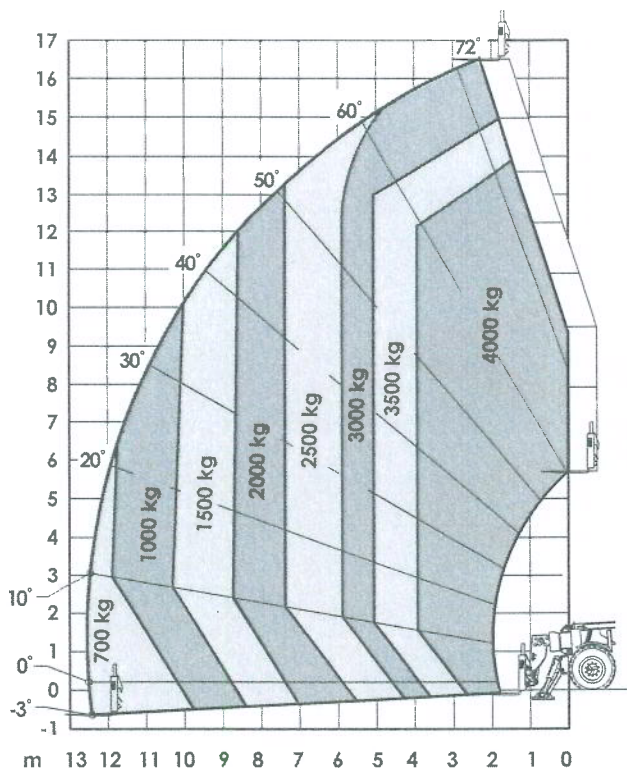

Frame levelling device activated.
Complies with EN1459 - Annex B

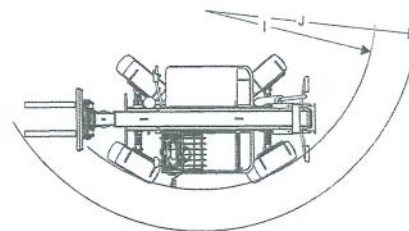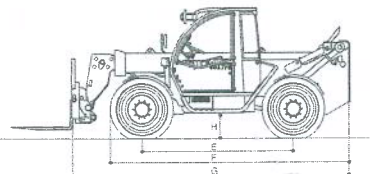

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.



De Hoogwerkerstunter
Industrieweg 20, 5571 LJ Bergeijk
T +31 (0)85 400 00 15
info@hoogwerkerstunter.com
hoogwerkerstunter.com

IBANnr: NL65ABNA0534047440
BIC: ABNANL2A

Kamer van Koophandel: 17240941
BTW nummer: NL820357819B01

TELESCOPIC MATERIAL HANDLERS

JLG MODEL 4017PS

Features

- Lifting Height of up to 16.70 m
- Maximum capacity of 4,000 kg
- Clear View cab provides all round vision
- Audio-visual Load Stability indicator
- Mechanical Quick-switch Coupler for Efficient attachment changes
- Four-wheel steering - Front wheel, Co-ordinated and crab.
- Powershift transmission
- Four wheel drive
- 45% gradeability.
- Frame levelling
- Stabilisers

Performance

Maximum Lift Capacity

4,000 kg

Capacity at full height

3,000 kg

Maximum Forward Reach

12.50 m

Capacity at Maximum Forward Reach

700 kg

Lifting Height

16.70 m

Reach at Maximum Height

1.60 m

Break-out force with standard bucket

70kN

Towing Capacity

5,000 kg

Carriage Rotation

142°

Standard Specifications

Engine

Perkins 1104D-44T, 74.5kw @ 2200 rpm.
4.4 litre, turbocharged, liquid cooled
EPA T3, EEC Stage IIIA compliant.

140L Fuel Tank

7.9L Engine Oil

19.7L Coolant

Hydraulic System

Load Sensing Piston Type 132 L/min
160L Reservoir

Transmission

Powershift, 4 forward & 3 reverse gears

Drive

4x4

Steering

4WS/Front Steer/Crab Steer

Parking Brakes

Wet multi disc

Accessories & Options

- Air-conditioning
- Work lights on Boom
- Front & Rear Cab work lights
- Rotating Beacon
- Radio
- Hydraulic Quick-switch Coupler
- Pre-arrangement for Smart Basket

Attachments

Pallet Forks and Carriages

Side-shift Carriage

Fork positioning Carriage

General Purpose Bucket

Digging Bucket

4-in-1 bucket

Truss Boom

Fixed width Smart Basket (1.8 m)

Extendable Smart Basket (2.4 m – 4.5 m)

