
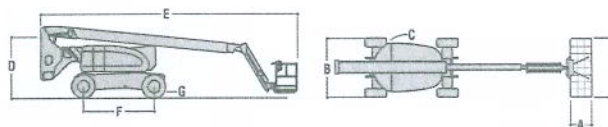


	<b>800AJ</b>
Platform height	24.46 m
Horizontal outreach	15.74 m
Up and over height	9.78 m
Swing (continuous)	360°
Platform capacity – unrestricted	230 kg
Platform rotator (hydraulic)	180°
Jib – overall length	1.83 m
Jib – range of articulation	130° (+70°/ -60°)
A. Platform size	0.91 m x 1.83 m
B. Overall width	2.43 m
C. Tailswing – working condition	0.76 m
D. Stowed height	3.00 m
E. Stowed length	11.12 m
F. Wheelbase	3.05 m
G. Ground clearance	0.30 m
Machine weight <sup>1</sup>	15,600 kg
Maximum ground bearing pressure	5.40 kg/cm <sup>2</sup>
Drive speed 2WD	4.8 km/h
Drive speed 4WD	4.8 km/h
Gradeability 2WD	30%
Gradeability 4WD	45%
Tyres	IN 445/55 D19.5 Foam Filled
Axle oscillation	0.20 m
Turning radius – inside 2WS	3.66 m
Turning radius – inside 4WS	2.13 m
Turning radius – outside 2WS	6.86 m
Turning radius – outside 4WS	4.42 m
Diesel engine – Deutz D2011L04	48.5 kW <sup>3</sup>
Diesel engine – (option) CAT 3.4	47 kW
Fuel tank capacity	151 L
Hydraulic reservoir	261 L
Auxiliary power	12V DC

<sup>1</sup> Certain options or country standards may increase weight and/or dimensions.

<sup>2</sup> Optional.

<sup>3</sup> With EGR.

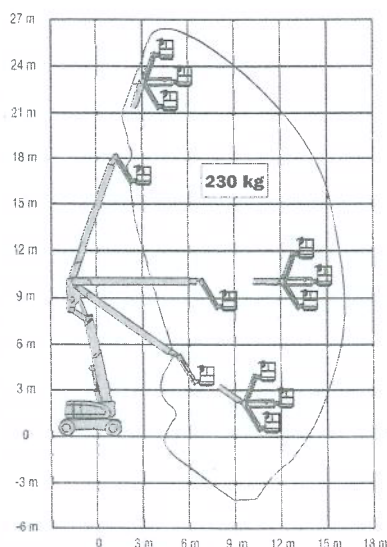

De Hoogwerkerstunter  
Industrieweg 20, 5571 LJ Bergeijk  
T +31 (0)85 400 00 15  
info@hoogwerkerstunter.com  
hoogwerkerstunter.com

IBANnr: NL65ABNA0534047440  
BIC: ABNANL2A

Kamer van Koophandel: 17240941  
BTW nummer: NL820357819B01